

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Волгод (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://mac.nt-rt.ru> || mcp@nt-rt.ru

PPC 036 SERIES SPECIFICATIONS

ELECTRICAL

Supply Voltage	18 to 28 VDC
Supply Current	50 to 350 mA
Command Signal.....	0 to 10V or 4 to 20 mA
Command Type	Single Ended or Differential
Command Signal.....	4.99K Ω $\pm$ 1.0% (Voltage)
Input Impedance	312 Ω $\pm$ 0.1% (Current)
Analog Monitor Symbol,AMS	0 to 10V, Single Ended
Logic Monitor Signal, LMS.....	Two Types of Signals (See How To Order)
EMI / RFI Protection	Common Mode and High Frequency Noise Reduction

PNEUMATIC


Inlet Pressure*.....	120 PSI Maximum (for 10-100 Output Pressure)
Fluids	Air or Inert Gases
Lubrication	Not Required. However, if used, a medium aniline point oil is recommended
Output Pressure.....	0 to 10, 30, 45, 60, and 100
Overall Accuracy	$\pm$ 1.5% Full Scale $\pm$.5% Full Scale $\pm$ 2.5% Full Scale $\pm$.25% Full Scale
Flow Cv.....	.25, .30
Ports	1/8", 1/4" Tube Receptacle
Minimum Closed End Volume.....	1.0 cu. in.

PHYSICAL

Enclosure.....	Aluminum Barstock, Sealed
Connector (Covered).....	3,5,6 or 7 Pin Plug-in or 7 Wire Grommet
Connector (Coverless)	Pin Terminal Block
Mounting.....	Any Plane
Vibration	Not Affected
Ambient Temperature Range	0 to 50°C (32° to 120°F)
Washdown (Covered Only).....	Standard


*20 psi Maximum Inlet for 10 psi Output Pressure.

PPC 036A - X XX - XX XX - XX XX - 9




How to Order - 36 Series EPP Circuit Bar

EPP 036A - XX X X X - XX - 9

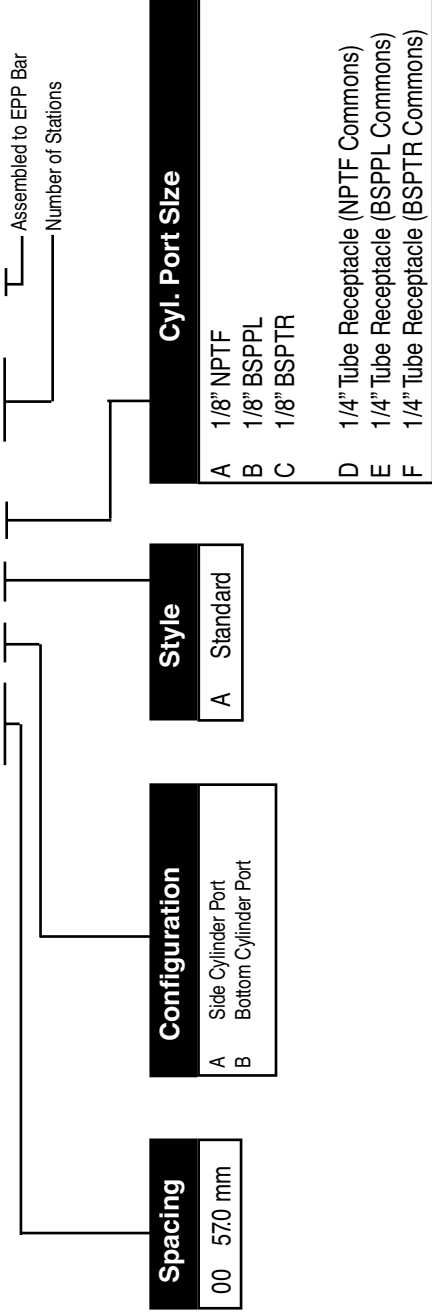

COVERLESS PPC WIRING PIN OUT

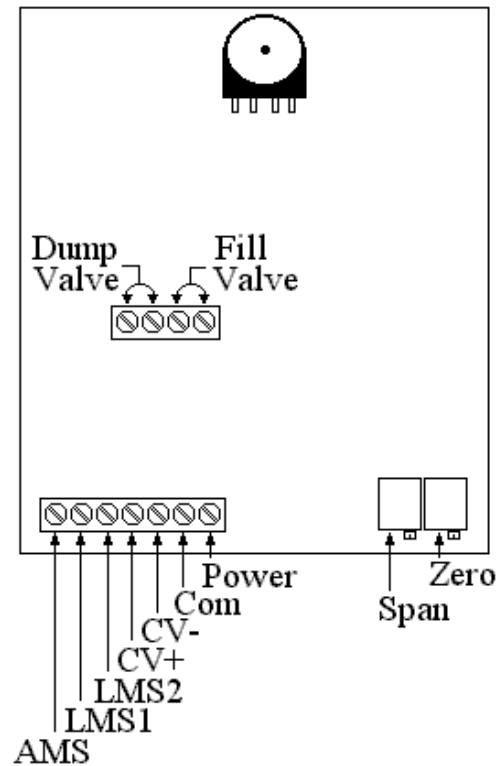

AMS – ANALOG MONITOR SIGNAL

- 0-10 VDC FEEDBACK SIGNAL THAT PROVIDES A VOLTAGE PROPORTIONAL TO THE OUTPUT PRESSURE

LMS 1 – LOGIC MONITOR SIGNAL

- 5 VDC (TTL HIGH), 24 VDC (HIGH), 5 VDC (LOW), OR 24 VDC (LOW) “GO/ NO GO” FEEDBACK SIGNAL (DEPENDING ON REQUIREMENTS)

LMS 2 – LOGIC MONITOR SIGNAL

- 5 VDC (TTL LOW), 24 VDC (HIGH), OR 24 VDC (LOW) “GO / NO GO FEEDBACK SIGNAL (DEPENDING ON REQUIREMENTS)

CV+ - POSITIVE COMMAND SIGNAL

- POSITIVE LEAD FOR THE 0 – 10 VDC OR 4-20 MA COMMAND SIGNAL (DEPENDS ON REQUIREMENTS)

CV- - NEGATIVE COMMAND SIGNAL

- NEGATIVE LEAD FOR THE 0 – 10 VDC OR 4 –20 MA COMMAND SIGNAL (DEPENDS ON REQUIREMENTS)






COM – MAIN POWER COMMON

- COMMON LEAD FOR THE 24 VDC POWER

PWR – MAIN POWER

- POSITIVE LEAD FOR THE 24 VDC POWER

36 SERIES COVERLESS PPC

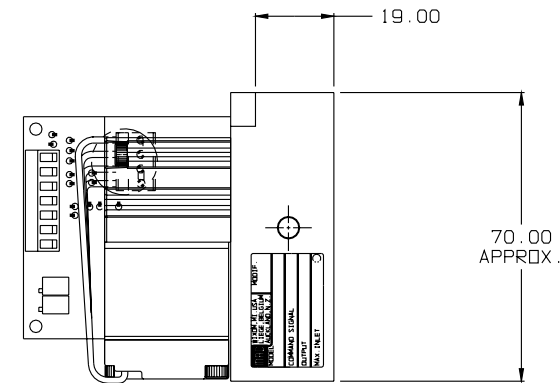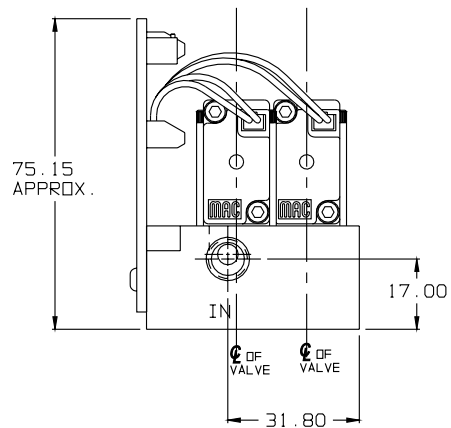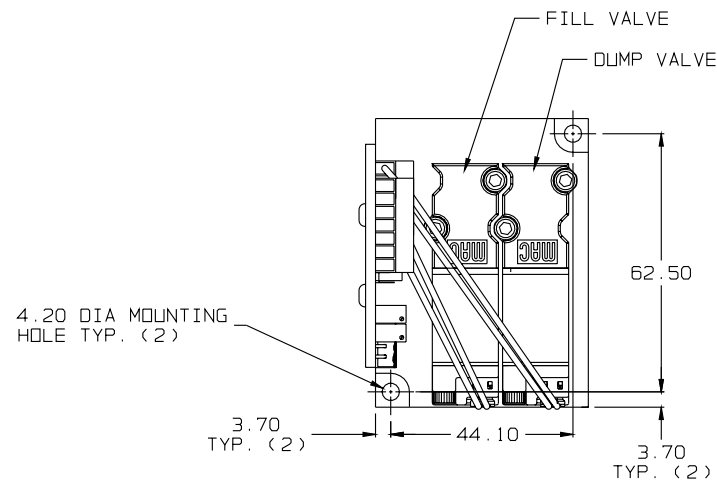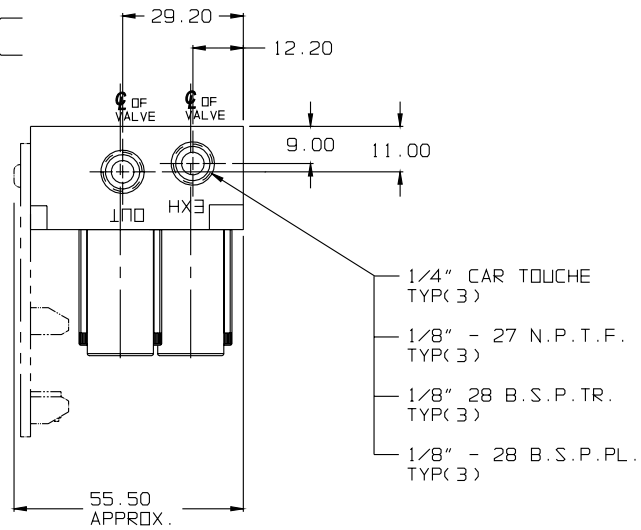

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://mac.nt-rt.ru> || mcp@nt-rt.ru