

Алматы (7273)495-231
 Ангарск (3955)60-70-56
 Архангельск (8182)63-90-72
 Астрахань (8512)99-46-04
 Барнаул (3852)73-04-60
 Белгород (4722)40-23-64
 Благовещенск (4162)22-76-07
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Владикавказ (8672)28-90-48
 Владимир (4922)49-43-18
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
 Ижевск (3412)26-03-58
 Иркутск (395)279-98-46
 Казань (843)206-01-48
 Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Коломна (4966)23-41-49
 Кострома (4942)77-07-48
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курск (4712)77-13-04
 Курган (3522)50-90-47
 Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41
 Нижний Новгород (831)429-08-12
 Новокузнецк (3843)20-46-81
 Ноябрьск (3496)41-32-12
 Новосибирск (383)227-86-73
 Омск (3812)21-46-40
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16
 Петрозаводск (8142)55-98-37
 Псков (8112)59-10-37
 Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
 Рязань (4912)46-61-64
 Самара (846)206-03-16
 Санкт-Петербург (812)309-46-40
 Саратов (845)249-38-78
 Севастополь (8692)22-31-93
 Саранск (8342)22-96-24
 Симферополь (3652)67-13-56
 Смоленск (4812)29-41-54
 Сочи (862)225-72-31
 Ставрополь (8652)20-65-13
 Сургут (3462)77-98-35
 Сыктывкар (8212)25-95-17
 Тамбов (4752)50-40-97
 Тверь (4822)63-31-35

Тольятти (8482)63-91-07
 Томск (3822)98-41-53
 Тула (4872)33-79-87
 Тюмень (3452)66-21-18
 Ульяновск (8422)24-23-59
 Улан-Удэ (3012)59-97-51
 Уфа (347)229-48-12
 Хабаровск (4212)92-98-04
 Чебоксары (8352)28-53-07
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Чита (3022)38-34-83
 Якутск (4112)23-90-97
 Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://mac.nt-rt.ru> || mcp@nt-rt.ru

Direct solenoid and solenoid pilot operated valves

Function	Port size	Flow (Max)	Individual Mounting	Series
3/2 NO-NC	1/4" – 3/8"	2.0 Cv	Inline	53

OPERATIONAL BENEFITS

1. The 4-way pilot develops maximum shifting force both ways
2. Memory spring available
3. Balanced spool, immune to variations of pressure, also provides high flow
4. Short stroke with high flow
5. Bonded spool with minimum friction, shifting in a glass-like finished bore
6. Pilot with balanced poppet, high flow, short and consistent response times.
7. Wiping effect eliminates sticking
8. Long service life

HOW TO ORDER



Port size	Pilot air	NC Valve	NO Valve
1/4" NPTF	Internal	53A-1AA-xx-xxxx-xxx	53A-2AA-xx-xxxx-xxx
3/8" NPTF		53A-1AB-xx-xxxx-xxx	53A-2AB-xx-xxxx-xxx
1/4" NPTF	External from 10 end	53A-1BA-xx-xxxx-xxx	53A-2BA-xx-xxxx-xxx
	from 12 end	53A-1CA-xx-xxxx-xxx	53A-2CA-xx-xxxx-xxx
3/8" NPTF	External from 10 end	53A-1BB-xx-xxxx-xxx	53A-2BB-xx-xxxx-xxx
	from 12 end	53A-1CB-xx-xxxx-xxx	53A-2CB-xx-xxxx-xxx

SOLENOID OPERATOR

DM – D XX X – X XX

XX	Voltage	X	Wire length	X	Manual Operator	XX	Electrical connection
JA	110/50, 120/60	A	18"	1	Non locking	BA	Flying leads
JB	220/50, 240/60	B	24"	2	Locking	KA	Mini square connector
JC	24/60	J [†]	6"			KD	Mini square connector with light
FB	24VDC (1,8W)					JB	Rectangular connector
DA	24VDC (5,4W)					JD	Rectangular connector with light
DF	24VDC (12,7W)						

[†] For use with "J" and "K" type connectors

GM – G XX X – X XX

XX	Voltage	X	Wire length	X	Manual Operator	XX	Electrical connection
DC	24VDC (1,8W)	A	18"	1	Non locking	BA	Flying leads
DD	24VDC (2,5W)	B	24"	2	Locking	BT	Flying leads with light
DF	24VDC (4,0W)	C	36"			KA	Solenoid plug-in wire assembly
						KT	Solenoid plug-in wire assembly with light
						GA	MAC JAC solenoid plug-in wire assembly

OPTIONS

53A- X A A-xx-xxxx-xxx

- For valve less base
- For memory spring

- Replace by 0
- Replace by 5 (Normally closed)
- Replace by 6 (Normally open)


TECHNICAL DATA

Fluid:	Compressed air, vacuum, inert gases
Pressure range:	Internal pilot: 20 to 120 PSI (Memory spring option: 35-120 PSI) External pilot: Vacuum to 120 PSI
Lubrication:	Not required, if used select a medium aniline point lubricant (between 180°F and 210°F)
Filtration:	40μ
Temperature range:	0°F to 120°F (-18°C to +50°C)
Orifice:	8,5 mm
Flow:	1/4": Cv 1.7 – 3/8": Cv 2.0
Coil:	Epoxy encapsulated - Class A wires – 100% ED (specify mod. 0449)
Voltage range:	-15% to +10% of nominal voltage
Protection:	IP54 (GM pilot) – IP64 (DM pilot)
Power:	1,0 to 5,4W (Higher wattages available)

Options: BSPP threads

DIMENSIONS

Shown with 3/8" and KA connector

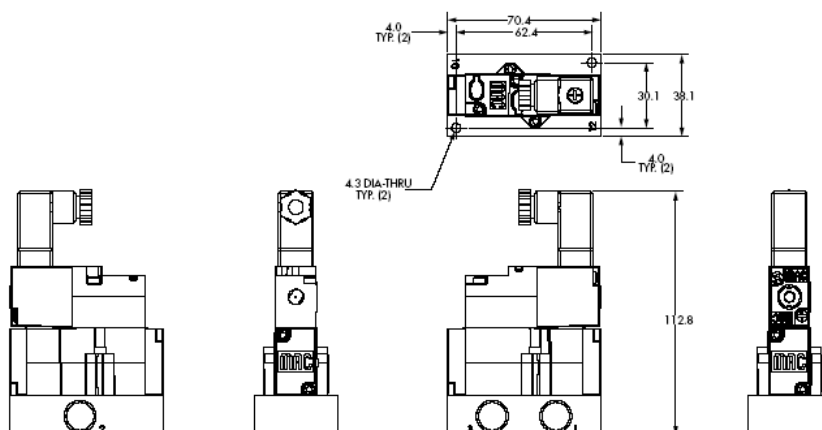

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47